


Drop Leaf Instructions


AVJ42DL, W42ADL

Parts List

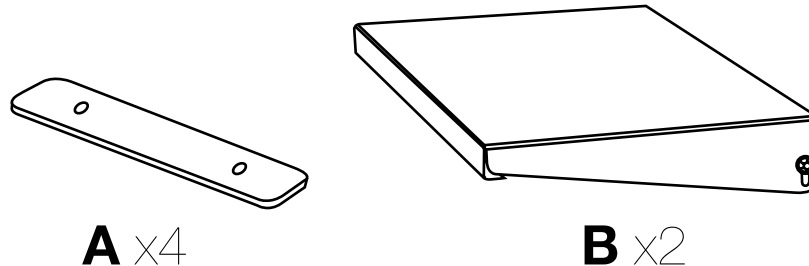

Tools Required

- Phillips Screwdriver
- Pliers or Adjustable Wrench

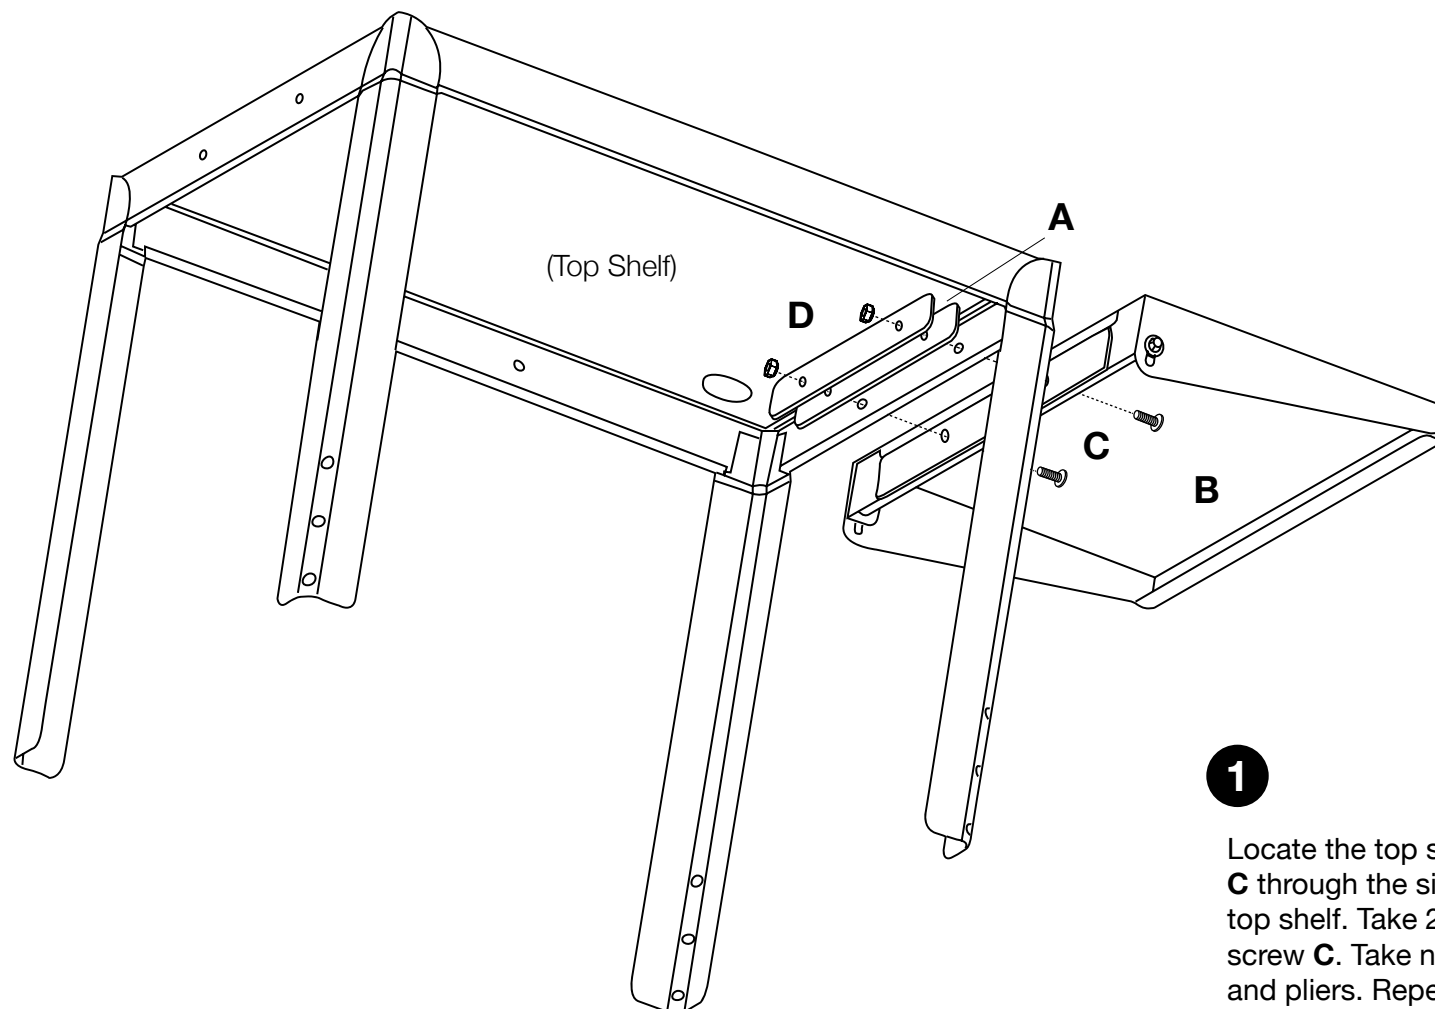

1


Locate the top shelf of your metal cart. Push screw **C** through the side holes of drop shelf **B** and the top shelf. Take 2 **A** brackets and push them through screw **C**. Take nut **D** and fasten with a screwdriver and pliers. Repeat this on the other side.

www.luxorfurn.com
www.hwilson.com


Adjustable Height Metal Cart Instructions

AVJ42, W42A



Parts List




A x1



B x1



C x4




D x4



E x4


Tools Required

- Phillips Screwdriver
- Rubber Mallet
- Pliers or Adjustable Wrench

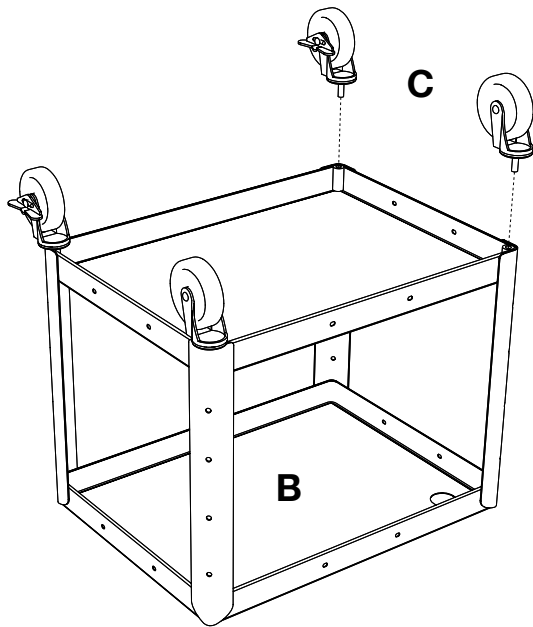


1

Position the bottom shelf **B** so that the caster holes are facing up. Insert caster **C** into the caster holes on the bottom of shelf **B**. Use a mallet to set the casters properly.

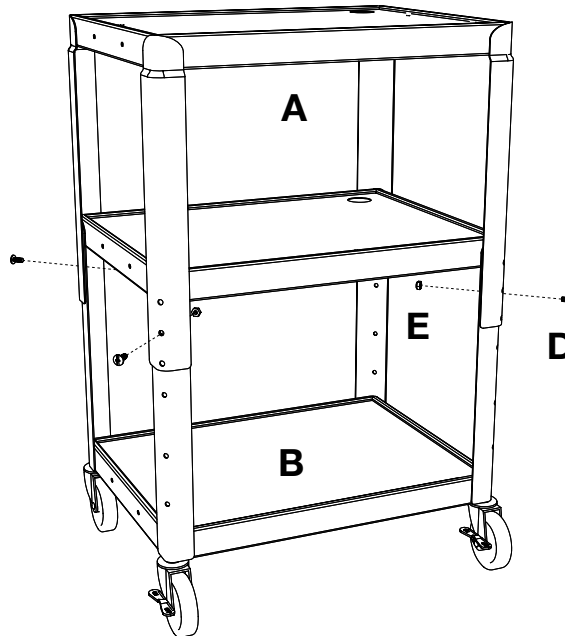

2

Flip bottom shelf **B** so that it is on its side. Set top shelf **A** so that it overlaps bottom shelf **B**. Align the screw holes so that the top shelf **A** is at the desired height.

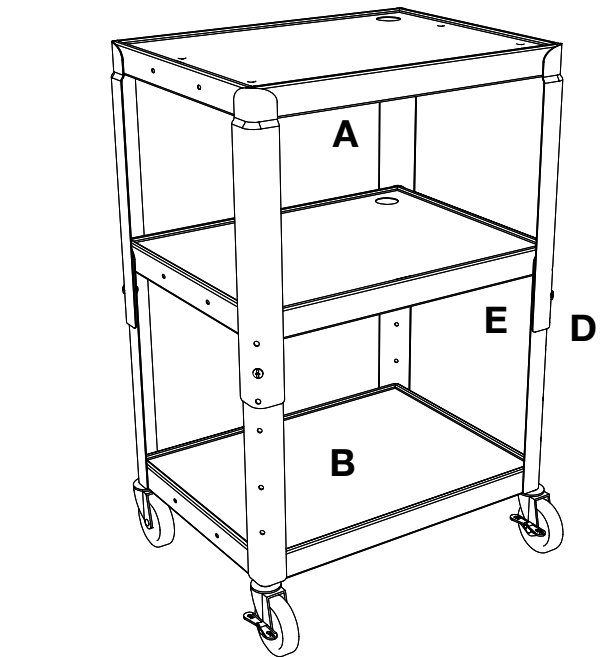

3


Insert screw **D** through the aligned screw hole of **A** and **B** and fasten nut **E** with pliers and screwdriver. Place Non-slip mat on desired shelf. The cart is now complete.

www.luxorfurn.com
www.hwilson.com

Electric Assembly Instructions



Number of outlets
may vary.

Parts List

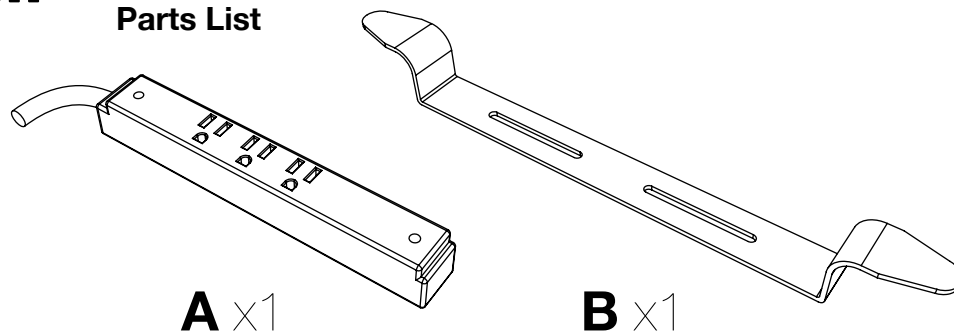

Tools Required

- Screwdriver

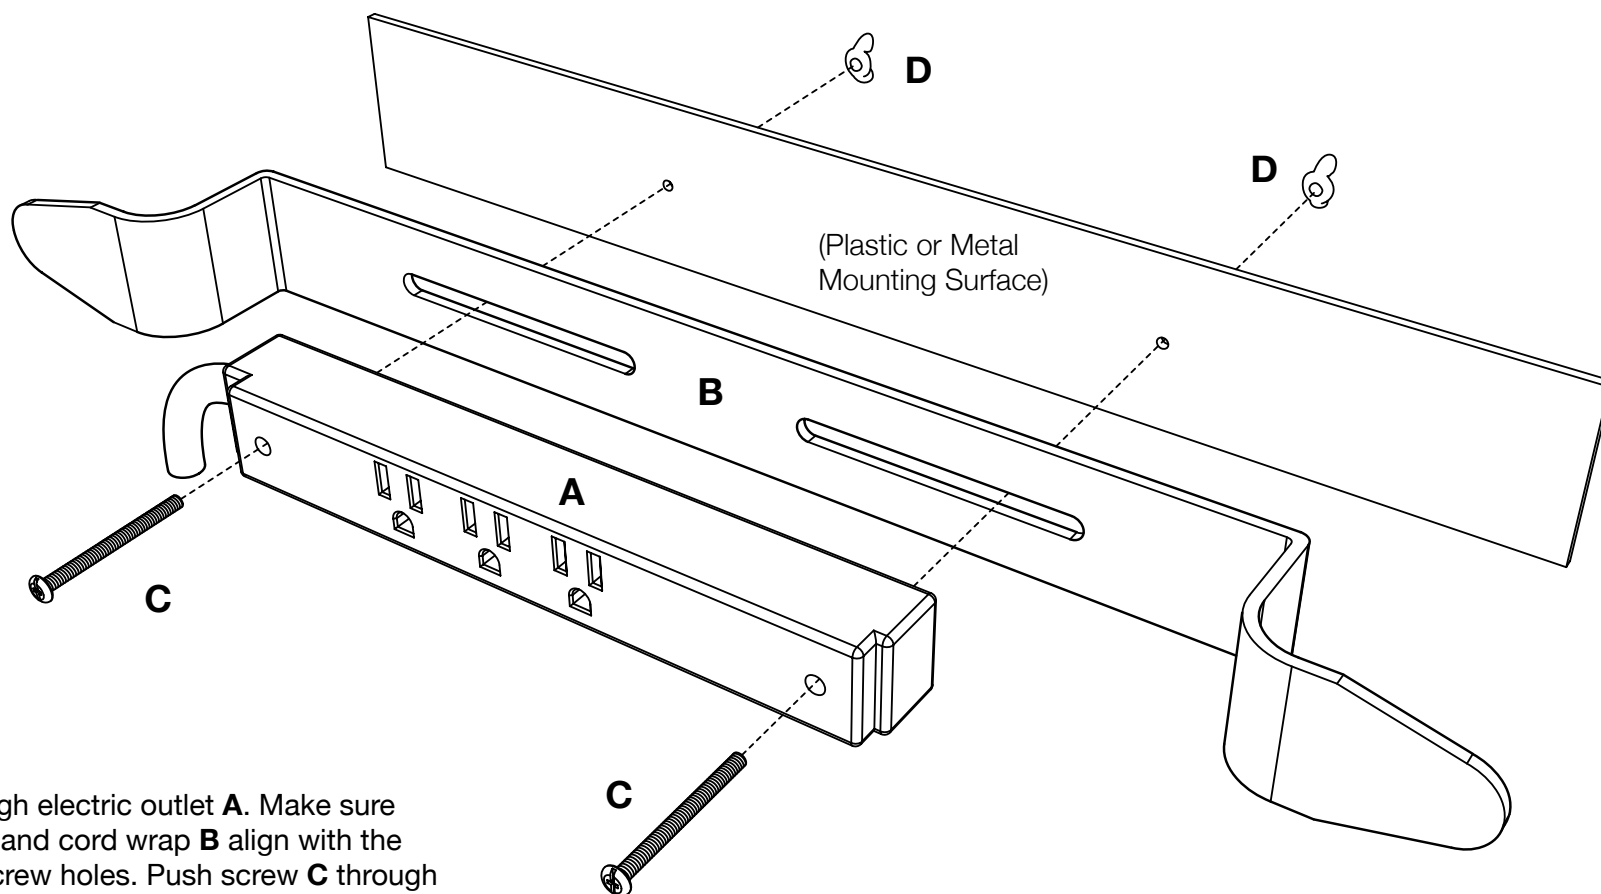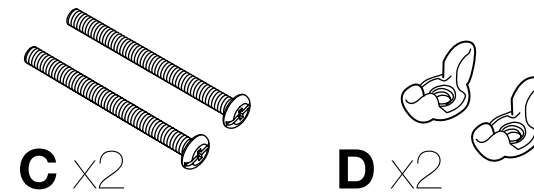

1

Push screw **C** through electric outlet **A**. Make sure the electric outlet **A** and cord wrap **B** align with the mounting surface screw holes. Push screw **C** through cord wrap **B** and the mounting surface screw holes. Use wing nut **D** and screwdriver to fasten.


Metal / Plastic Cart
LCD Instructions

Tools Required



- Phillips Screwdriver
- 8mm Wrench

Requires Completed
Cart Before Assembly



Lock Casters
Before Assembly

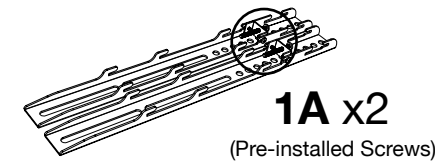

1 x2

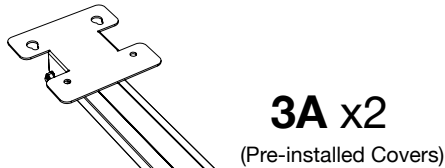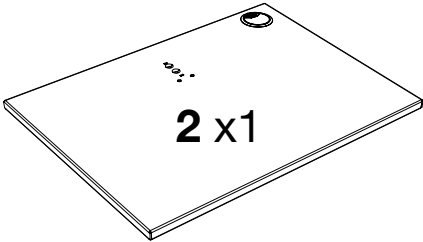

3 x1

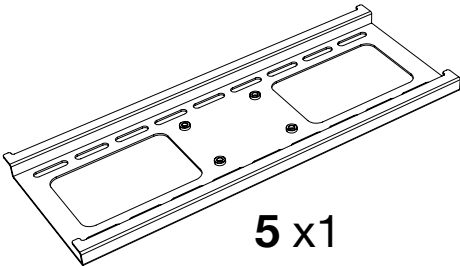

Parts List

LCD Component List





- 1** - TV brackets x2
- 2** - Base plate x1
- 3** - Aluminium tube x1
- 4** - L support bar x2
- 5** - TV Mount x1

Hardware Bag

- A** - M5x16 TV screw x4
- B** - M6x16 TV screw x4
- C** - M8x35 TV screw x4
- D** - M6 metal washer x4
- E** - M6x35 allen screw x4
- F** - M6 metal washer x4

- G** - M6x20 tube screw x2
- H1** - M6 metal washer x2
- H2** - Tube spacer x1
- I** - M8 metal washer x2
- J** - M8x15 allen screw x2
- K** - M8x25 allen screw x2
- L** - M8 locking nut x2
- M1** - M5x15 allen screw x4
- M2** - M5x50 allen screw x4
- N** - M5 metal washer x4
- O** - Allen wrench x1
- P** - TV screw spacer x4
- Q** - Angle bracket x1

01/26/15

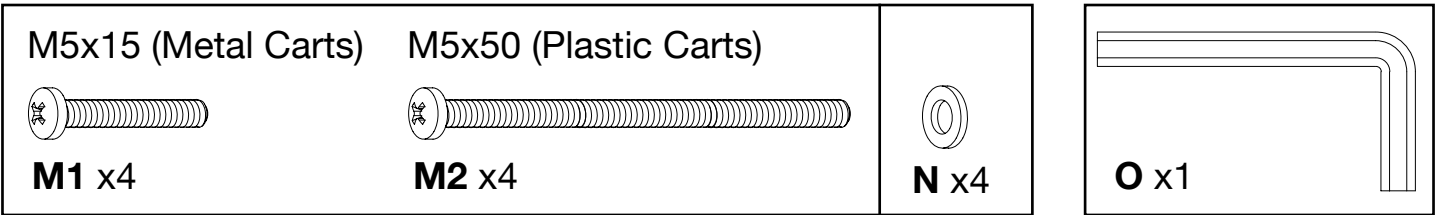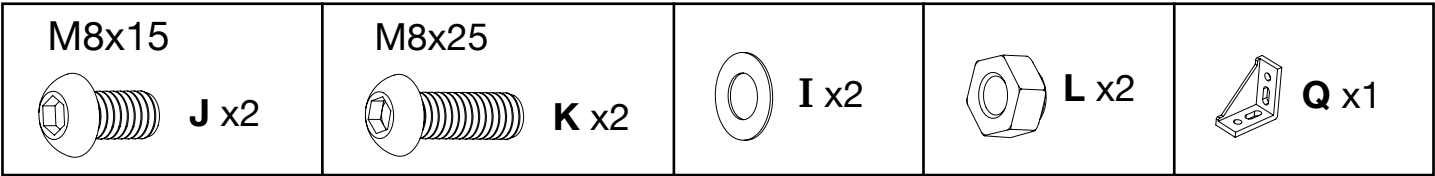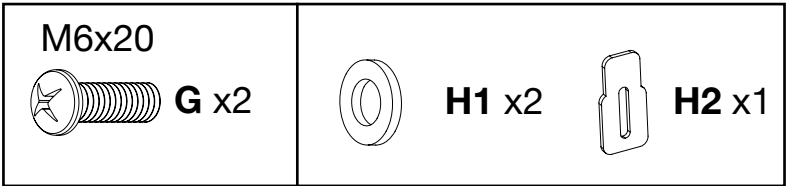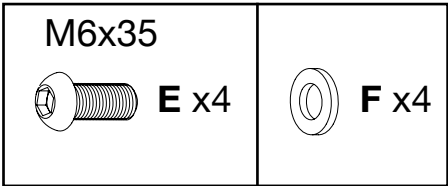

TV Mounting Hardware

