




Highlander XP™

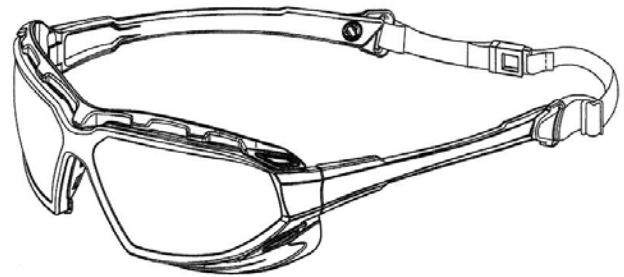

SPECIAL FEATURES

- Resilient & Durable frame features an extended side shield design that provides full eye protection from impact and flying particles
- Removable inner foam lens clip provides extra comfort and protection from airborne particles. Remove the lens clip and strap for a sporty safety spectacle for work or play.
- Indirect vented foam carriage provides maximum dust protection with sufficient airflow, providing an outlet for heat to reduce fogging.
- Fully adjustable elastic strap with quick release attaches to temples providing a secure fit.
- Polycarbonate lenses provide 99% protection against harmful UV rays.

GENERAL SPECIFICATIONS

Lens thickness: 2.3 mm	PD: 68 mm
Lens Base: 8 curve	Weight: 36 gm
Lens size vertical: 49 mm	Lens size diagonal: 68.4 mm
Bridge: 9 mm	Temple length (lens-tip): 166 mm
Overall Width (hinge-hinge): 136.5 mm	Closest point between lens: 15.6mm
Closest point between temple tips: 80mm	

FRAME & LENS OPTIONS

Lens Options: Clear, Tinted, Mirrored
 Temple Options: Various

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	8 base Curve, Wrap around design w/side protection
Frame	Nylon	8C dual frame style, clipped with foam adaptor
Foam carriage	Nylon	Indirect vented structure with front frame for adapting foam
Foam	CR (chloroprene rubber) foam	Flexible material with cushion provides the top protection from dusts & flying particles with the best fitting & comfort
Nose piece	PVC	Universal fit
Temple	Polycarbonate	Straight side style, very flexible
Strap	<i>Polyester</i>	Adjustable textile elastic fixed on strap holders with quick-release parts
Strap holder	POM (Polyoxymethylene)	Sewed with thin strap
Hinge	Nylon / Polycarbonate	3 Barrel Type, integral to Frame/ratchets
Screw	Stainless Steel	Standard Hinge screw

MARKINGS

Lens: As per standard
 Frame: As per standard

PACKAGING

1 pc in a polybag; 12 pcs in an inner box; 300 pcs in a case

STANDARDS

Meets ANSI, CE, AS and CSA