

EC1850BL



Combination Warmer

Warm your blankets and fluids for busy emergency rooms, operating rooms and labor and delivery units in the convenient, reliable and affordable EC1850BL combination warmer. Separate controls ensure that blankets and fluids are safely and accurately heated to recommended temperatures. Improve recovery time by efficiently warming patients from admission to discharge, reducing surgical site infections.

The durable, heavy-duty stainless steel Titan Series combination warmer quickly and efficiently heats blankets and fluids to precise temperatures using the digital control, ensuring your warmed fluids meet healthcare guidelines for IV and irrigation fluids.

WarmSafe Zone Heating: Heat is evenly balanced throughout the chamber to provide safe fluid warming.

Durable: The affordable, rugged stainless steel cabinets are made to last and work just as hard as you do.

Convenient: Easily stock and access blankets and fluids

Mobile: Rugged casters are designed to easily transport warmed fluids and blankets throughout the facility.

Glass Window: The glass window allows staff to take an immediate inventory of the amount of warmed fluids and blankets available.

Service: Our worldwide support team is dedicated to providing quality equipment. We walk with you every step of the way to maximize your return on investment:

Made in the USA with a commitment to quality

An ISO 13485:2016 certified company

Standard Features

- Dual chamber with two (2) windowed doors.
- Stainless steel exterior and interior.
- Programmable control.
- Temperature recording software/WarmWatch®
- One (1) adjustable shelf in the blanket compartment.
- Four (4) casters with brakes (2 swivel, 2 rigid).



40

EC1850BL

30-40 blankets

30

EC1850BL

30 (1) liter bottles/24 (1) liter bags



Adjustable temperature range of

32°-71°C (90°-160°F) adjustable blanket mode

32°-40°C (90°-104°F) adjustable injection mode

32°-66°C (90°-150°F) adjustable irrigation mode

Accurate temperature

IRR +0/-1.67°C (-3°F)

INJ +0/-1.10°C (-2°F)



EC1850BL

Configurations (select one)

Door Assembly

☐ Windowed door (standard) ☐ Solid door

Door Swing

☐ Right hinged (standard) ☐ Left hinged

Door Lock

☐ No lock (standard) ☐ Manual

Electrical

☐ 120V 1PH ☐ 220V 1PH ☐ 230V 1PH

Accessories (select all that apply)

Feet

☐ Foot kit (5021814)

Built-in Trim Kit






☐ Trim kit

Seismic Mounting Brackets


Special installation requirements apply

☐ Contact factory

Specification

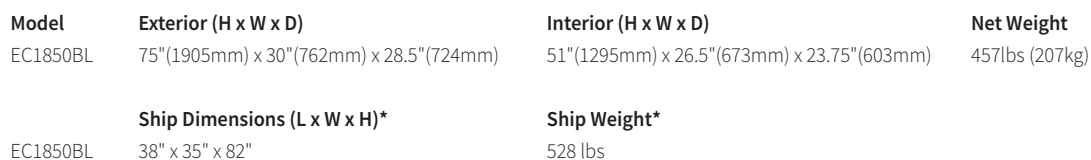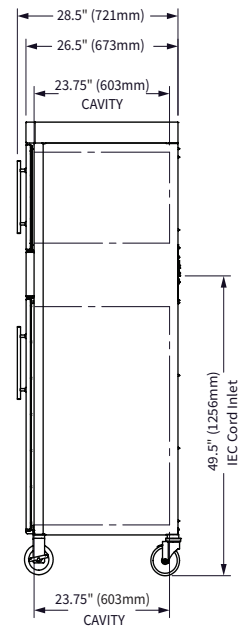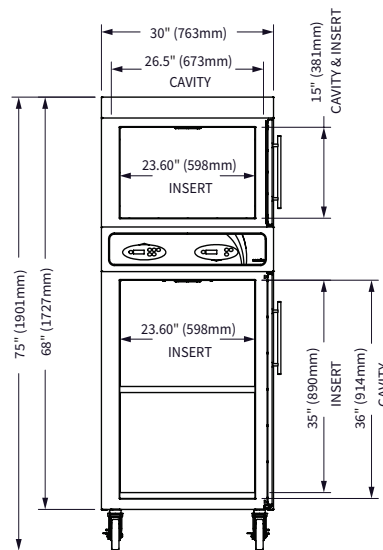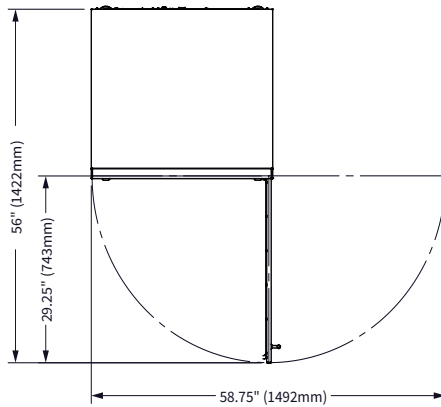

*Domestic ground shipping information. Contact factory for export weight and dimensions.

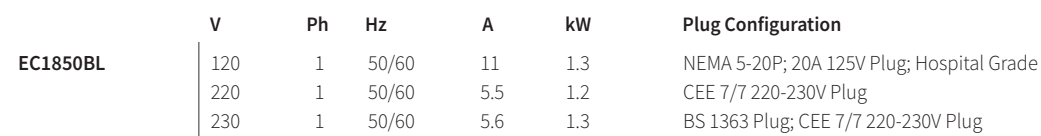

*Other international plugs are available, contact the manufacturer for more information.

**Electrical connections must meet all applicable federal, state and local codes.

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
Phone: 262.251.8356 | 800.862.9276 | Fax: 262.251.7067 | enthermics.com